




Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP68.
- 2. Recommend Panel Thickness: 0.8 To 5.0 mm.
- 3. Recommend Torque: 9~10 Kgf-cm.
- 4. Durability: 100 Cycles Min.
- 5. DWV: 650 Vrms
- 6. Rated Voltage: 30V AC/DC.
- 7. Insulation Resistance: 100 MΩ Min.
- 8. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
02	ECN-181126	150mm => 85mm , SHR-02V-S => SHR-09V-S , P1 => P5 , P2 => P9 Add Shrink Tube	Whitney 11/23/18	Lucas 11/23/18	Ray 11/23/18

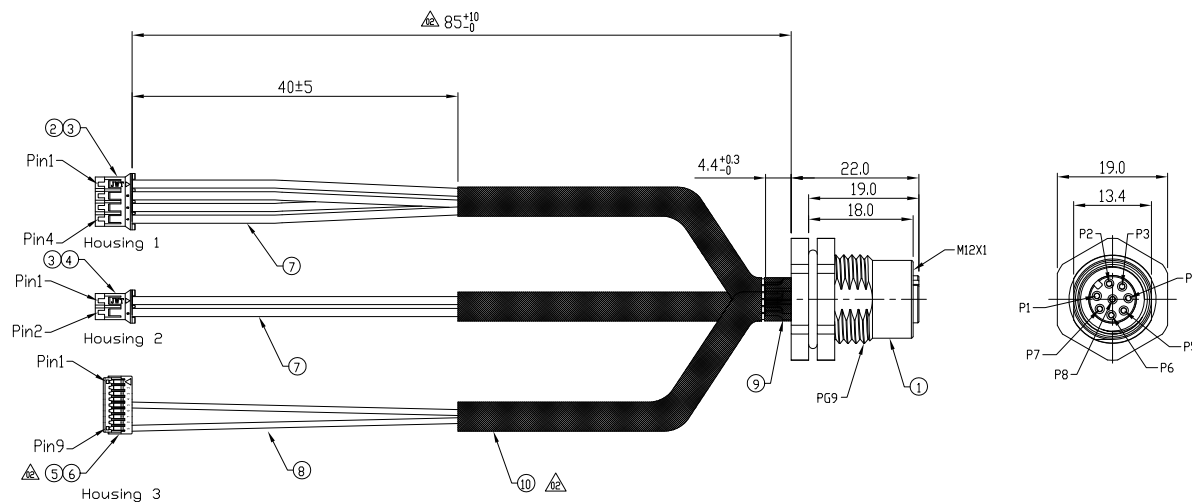

10	Shrink Tube	L=35mm Color: Black	3
9	Shrink Tube	L=10mm Color: Black	8
8	Wires	UL 1061 28AWG Wire Color: See Wiring Diagram	2
7	Wires	UL 1007 24AWG Wire Color: See Wiring Diagram	6
6	Terminal	JST P/N: SSH-003T-P0.2-H Or Equivalent Finish: Sn Plated	2
5	Housing	JST P/N: SHR-09V-S Pitch=1.0mm Or Equivalent Color: White	1
4	Housing	JWT P/N: A2001H02-2P Pitch=2.0mm Or Equivalent Color: White	1
3	Terminal	JWT P/N: A2001T0P-2 Or Equivalent Finish: Sn Plated	6
2	Housing	JWT P/N: A2001H02-4P Pitch=2.0mm Or Equivalent Color: White	1
1	M12 A-Coding 2A 8P Panel Front Mount Female Solder	GT Contact P/N: GT234102-01080	1
Item	Part Name	Material / Finish	Qty

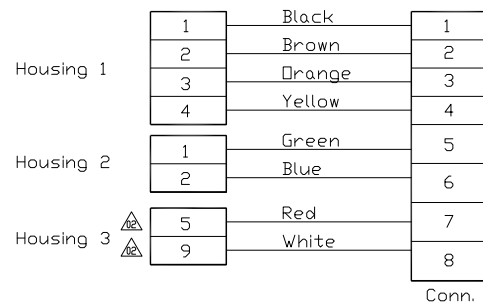

TITLE						DRAWING NUMBER		REV.
M12 A-Coding 2A 8P Panel Front Mount Female Solder With 85mm Cable + 4P + 2P + 9P Housing						GT234102-01080-CW-02		02
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
	B	1:1	Whitney 11/15/18	Lucas 11/15/18	Ray 11/15/18	X.X ± 0.5 X.XX ± 0.2	mm	1/1
						ANGLES ± 1°		

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

- (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
- (b) NOT TO REPRODUCE OR COPY IT
- (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
- (d) ALL RIGHTS RESERVED